



**Electrical Characteristics :**  
 Insulation Resistance : 500M $\Omega$  Min.  
 Contact Resistance : 50m $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 CUL File No : E215573

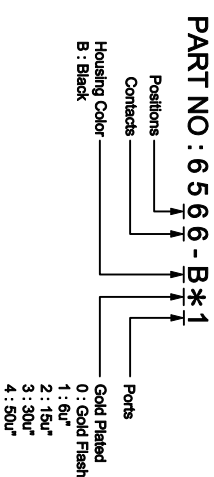

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 65 (SERIES)
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm
Ⓑ					
Ⓒ					
Ⓓ					
Ⓔ					

 **博 威 電 子 有 限 公 司**  
**POWERWAY ELECTRONICS CO.,LTD.**

TITLE	6P6C SIDE ENTRY PCB JACK	UNIT	mm
圖名		單位	inch
PART NO.	6566-B*1	SCALE	1:1
料號		比例	
REV.	A.1	DATE	2007-01-29
版本	日期		
CHECKED BY	Michael	DRAWN BY	Valiant
審核		製圖	