


SUGGESTED PCB LAYOUT
TOP VIEW


Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 50m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 6 6 A 6 6 - B * 1

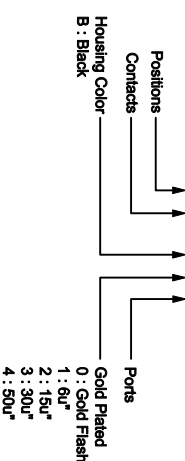

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 66 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm \pm 0.075 mm 0.00 mm \pm 0.15 mm 0.0 mm \pm 0.25 mm
(B)					
(C)					
(D)					
(E)					

 博 威 電 子 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.		TITLE 圖 名 6P6C SIDE ENTRY PCB JACK		UNIT 單位 mm inch	
PART NO. 料 號 66A66-B*1		SCALE 比 例 1 : 1			
REV. 版 本 A.1	DATE 日 期 2007-01-22				
CHECKED BY 審 核 Michael	DRAWN BY 製 圖 Valiant				