


SUGGESTED PCB LAYOUT  
TOP VIEW

**Electrical Characteristics :**  
 Insulation Resistance : 500M $\Omega$  Min.  
 Contact Resistance : 50m $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 Ⓑ Shielded: Brass , Tin Plating  
 CUL File No : E215573

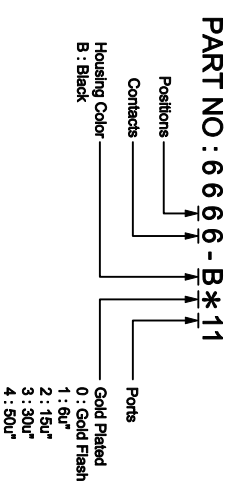

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 66 (SERIES)
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	<b>TOLERANCE (公差) :</b> 0.000 mm $\pm$ 0.075mm 0.00 mm $\pm$ 0.15mm 0.0 mm $\pm$ 0.25mm
Ⓑ	A.2	Nickel Plating改為Tin Plating	2010-04-14	Eric	
Ⓒ					
Ⓓ					
Ⓔ					

TITLE	SHEILED R/J11 6P6C	UNIT
圖名	SIDE ENTRY PCB JACK	mm
PART NO.	6666-B*11	inch
料號		SCALE
REV. 版本	A.2 日期	2007-03-08
CHECKED BY 審核	Michael	DRAWN BY 製圖
		Valiant

**PW** 博歲電子股份有限公司  
 POWERWAY ELECTRONICS CO.,LTD.