


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 66 A 8 8 - B * 1

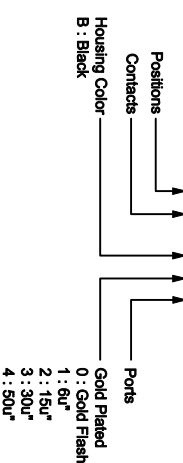

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 66 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	
(B)					TOLERANCE(公差) : 0.000 mm ± 0.075 mm
(C)					0.00 mm ± 0.15 mm
(D)					0.0 mm ± 0.25 mm
(E)					

 博 威 電 子 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.		TITLE NON-SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT 單位 mm inch	
PART NO. 料 號 66A88-B*1		DATE 日期 2007-04-13		SCALE 比 例 1 : 1	
REV. 版本 A.1		CHECKED BY 審 核 Michael		DRAWN BY 製 圖 Valiant	