


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 Shielded: Brass ,Nickel Plating
 CUL File No : E215573

PART NO : 8 1 8 8 D S - B * 2 * - 0

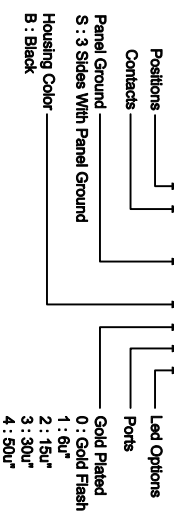


LED Color Options Table

LED 2 (Left)	LED 1(Right)	LED DASH OPTION
NO LED	NO LED	0
Yellow	Green	1
NO LED	Green	2
Yellow	NO LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
NO LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

ZONE	REV.	DESCRIPTION	DATE	APPD.
①	A.1	Withstand Voltage 500修改為 1000VAC	2008-08-01	Nick
②				
③				
④				
⑤				

FILE NO : 81 (SERIES)

TOLERANCE (公差) :
 0.000 mm ± 0.075mm
 0.00 mm ± 0.15mm
 0.0 mm ± 0.25mm



博 威 電 子 股 份 有 限 公 司
POWERWAY ELECTRONICS CO.,LTD.

TITLE	圖名	REV.	版本	DATE	日期	CHECKED BY	審核	DRAWN BY	製圖
SHEILED R145 WITH LED PCB JACK	WITH LED PCB JACK	A.1	A.1	2007-03-10	2007-03-10	Michael	Michael		
PART NO.	料號	8188DS-B*2*-0							
SCALE	比例	1:1							
UNIT	單位	mm							
		inch							
		Valiant							