

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0




Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

CUL File No : E215573

PART NO : 8 2 0 8 - B * 4

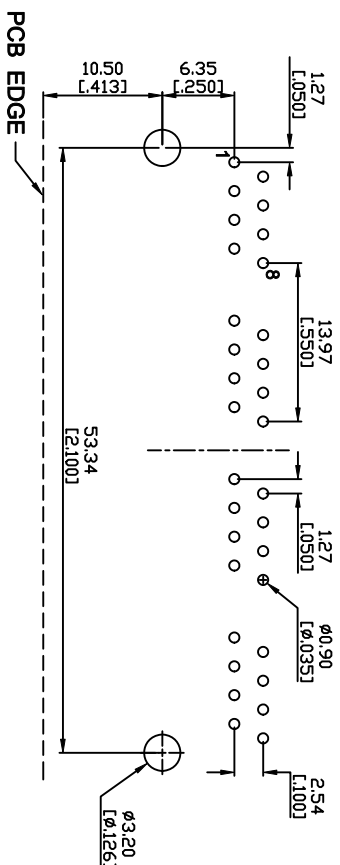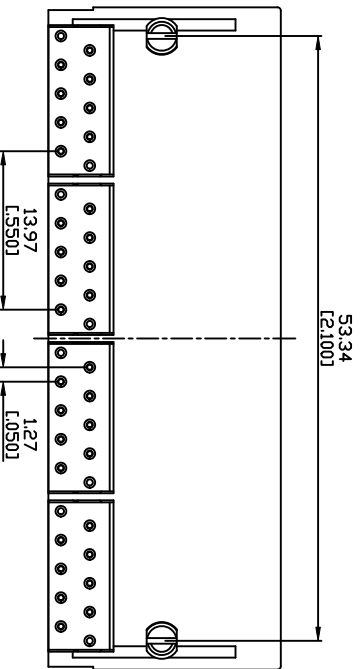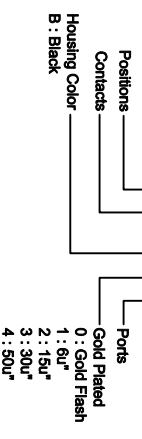

SUGGESTED PCB LAYOUT
 TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : 82 (SERIES)

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

PW 博 威 電 子 股 份 有 限 公 司
 POWERWAY ELECTRONICS CO.,LTD.

TITLE	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK	UNIT	mm
圖名		單位	inch
PART NO.	8208-B*4	SCALE	1:1
料號		比例	
REV.	A.1	DATE	2007-04-09
版本	日期		
CHECKED BY	Michael	DRAWN BY	Valiant
審核		製圖	