

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0


Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

CUL File No : E215573

PART NO : 8 2 0 8 - B * 6

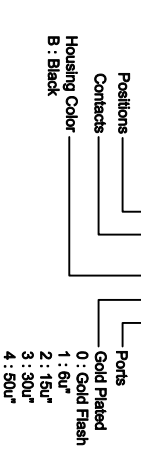

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 82 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

		博 崴 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	
		TITLE	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK
PART NO.	8208-B*6	圖名	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK
REV.	A.1	料號	8208-B*6
CHECKED BY	Michael	版本	A.1
DRAWN BY	Michael	日期	2007-11-06
製圖	Michael	比例	1:1
審核	Michael	單位	mm
		比例	inch
		製圖	David