


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
Insulation Resistance : 500M Ω Min.
Contact Resistance : 30m Ω Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing : Thermoplastic UL94V-0
Contact : Full Gold Plating
Spring Wire : Dia 0.45mm Phosphor Bronze
Optional Gold Plating Over Nickel
Shield : Brass, Nickel Plating.
CUL File No : E215573

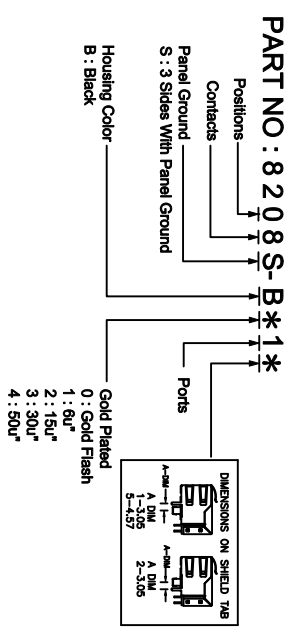

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 82 (SERIES)	TITLE	SHIELDED RJ45	UNIT
A	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick		圖名	SIDE ENTRY PCB JACK	mm
B						PART NO.	8208S-B*1*	inch
C						REV.		SCALE
D						版本		比例
E						CHECKED BY	Michael	
						DRAWN BY	製圖	Valiant



博 威 電 子 股 份 有 限 公 司
POWERWAY ELECTRONICS CO.,LTD.