


Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 30m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A


Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573
PART NO : 8 2 0 8 - B * 2 *

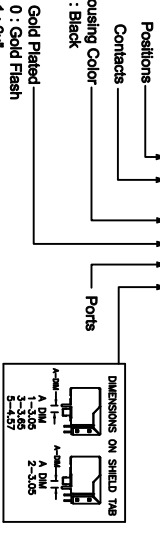

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : 82 (SERIES)

TOLERANCE (公差) :
 0.000 mm \pm 0.075 mm
 0.00 mm \pm 0.15 mm
 0.0 mm \pm 0.25 mm

 博 歲 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.		TITLE	SHEILED 2 PORTS RJ45	UNIT	mm
		圖 名	SIDE ENTRY PCB JACK	單位	inch
PART NO.	料 號	8208-B*2*	SCALE	比例	1:1
REV.	版 本	A.1	DATE	日期	2007-01-29
CHECKED BY	審 核	Michael	DRAWN BY	製 圖	Valliant