
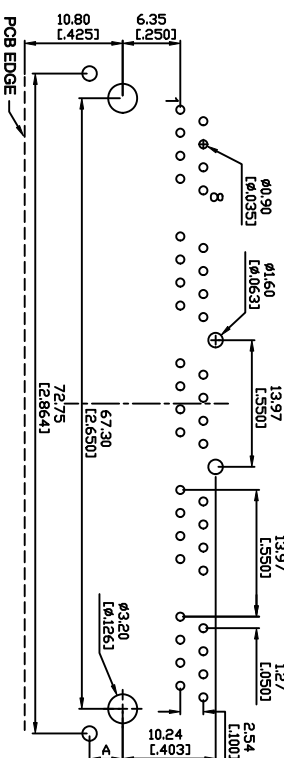
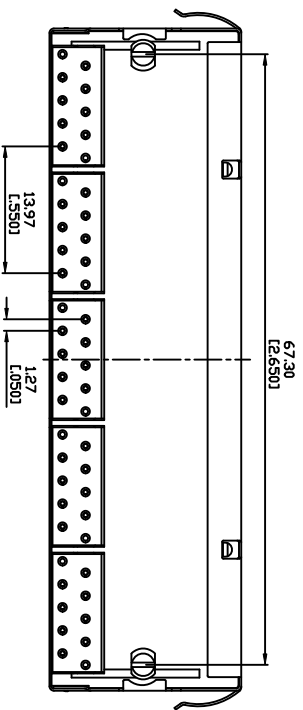


**Electrical Characteristics :**  
 Insulation Resistance : 500M  $\Omega$  Min.  
 Contact Resistance : 30m  $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 Shield : Brass, Nickel Plating.  
 CUL File No : E215573

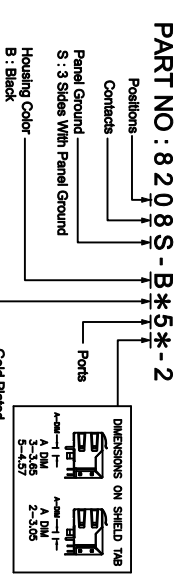

**SUGGESTED PCB LAYOUT  
TOP VIEW**

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : 82 (SERIES)

TOLERANCE (公差) :  
 0.000 mm  $\pm$  0.075 mm  
 0.00 mm  $\pm$  0.15 mm  
 0.0 mm  $\pm$  0.25 mm

		<b>博 歲 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		TITLE		SHIELDED RJ45	
				圖名		SIDE ENTRY PCB JACK	
PART NO.		8208S-B*5*-2		REV.		A.1	
料號		8208S-B*5*-2		日期		2007-03-13	
CHECKED BY		Michael		DRAWN BY		Valiant	
審核		Michael		製圖		Valiant	