


**Electrical Characteristics :**  
 Insulation Resistance : 500M $\Omega$  Min.  
 Contact Resistance : 30m $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 Shield : Brass, Nickel Plating.  
 CUL File No : E215573

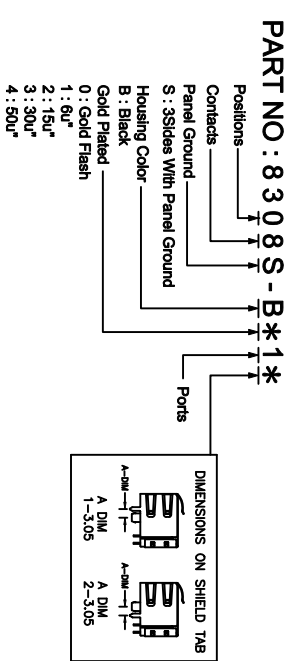

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 83 (SERIES)
①	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm
②					
③					
④					
⑤					

		<b>博 歲 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		TITLE	SHEILED R.145	UNIT	mm
				圖 名	SIDE ENTRY PCB JACK	單位	inch
PART NO.		8308S-B*1*		SCALE	1:1		
REV.	A.1	DATE	2007-03-07	CHECKED BY	Michéal	DRAWN BY	Valiant
版本	日期	日期	日期	審核	製圖	製圖	製圖