


Electrical Characteristics :
 Insulation Resistance : 500MQ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 Shielded: Brass ,Nickel Plating
 CUL File No : E215573

PART NO : 8 3 8 8 C S - B * 1 *

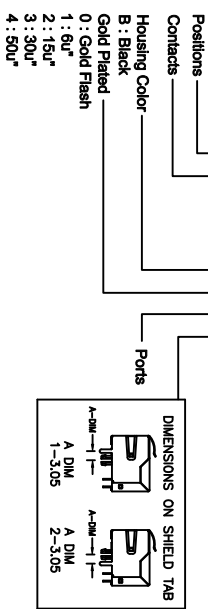

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 83 (SERIES)	TITLE	UNIT	
①	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075mm 0.00 mm ± 0.15mm 0.0 mm ± 0.25mm	SHIELDED RJ45 SIDE ENTRY PCB JACK	mm	
②						PART NO. 8388CS-B * 1 *	inch	
③						REV. A.1	DATE 2007-07-17	SCALE 1 : 1
④						CHECKED BY Michael	DRAWN BY Valiant	
⑤								

PW 博 威 電 子 股 份 有 限 公 司
 POWERWAY ELECTRONICS CO.,LTD.