

SUGGESTED PCB LAYOUT  
TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 30mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**

Housing : Thermoplastic UL94V-0


Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

CUL File No : E215573

**PART NO : 8508 - B\*8**

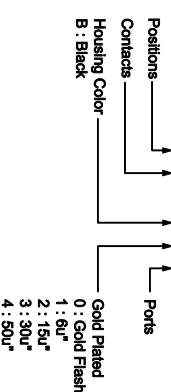

**PW** 博 歲 電 子 股 份 有 限 公 司  
 POWERWAY ELECTRONICS CO.,LTD.

TITLE	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK	UNIT 單位
圖名		mm
PART NO.	8508-B*8	Inch
料號		SCALE
REV.	A.1	日期
版本	DATE	2007-08-16
CHECKED BY	Michael	DRAWN BY
審核		製圖
		David