


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

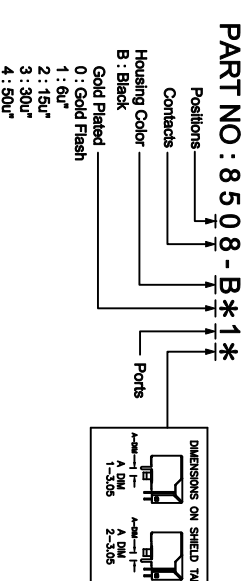

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
Ⓐ	A.1	尺寸更正為12.2	2007-05-15	Aaron	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
Ⓑ	A.2	Withstand Voltage 500修改為1000VAC	2008-08-01	NICK	
Ⓒ					
Ⓓ					
Ⓔ					

		博 歲 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	
TITLE	SHEIDED RJ45	UNIT	mm
圖 名	SIDE ENTRY PCB JACK	單位	inch
PART NO.	8508-B*1*	SCALE	1:1
料 號		比 例	
REV.	A.2	DATE	2007-01-16
版本	日期		
CHECKED BY	Michael	DRAWN BY	Valiant
審 核		製 圖	