


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

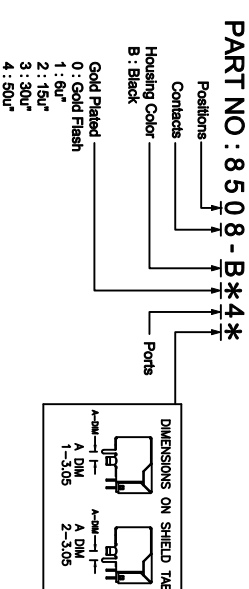

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : 85 (SERIES)

TOLERANCE (公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

		博 歲 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	
		TITLE	SHEILED RJ45
圖名		SIDE ENTRY PCB JACK	
PART NO.		8508-B*4*	
REV.	料號	DATE	SCALE
A.1	版本	日期	比例
2007-05-24	2007-05-24	1:1	
CHECKED BY	審核	DRAWN BY	製圖
Michael		Valiant	