

SUGGESTED PCB LAYOUT
TOP VIEW



ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為 1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : Selective Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

PART NO : 8508U-B*8*-*

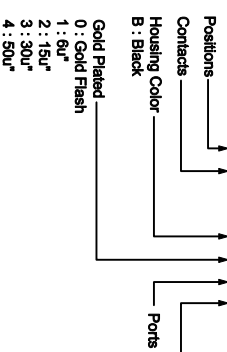

PW 博 歲 電 子 股 份 有 限 公 司
 POWERWAY ELECTRONICS CO.,LTD.

TITLE	SHIELDED RJ45	UNIT
圖名	SIDE ENTRY PCB JACK	單位
PART NO.	8508U-B*81-3	mm
料號		Inch
REV.	A.1	SCALE
版本	日期	比例
CHECKED BY	DATE	1:1
審核	2007-08-16	
	Michael	DRAWN BY
		製圖
		David