


**Electrical Characteristics :**  
 Insulation Resistance : 500M $\Omega$  Min.  
 Contact Resistance : 30m $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 CUL File No : E215573

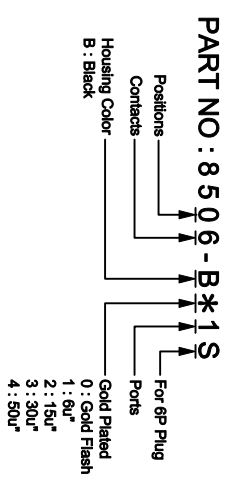

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	<b>TOLERANCE(公差) :</b> 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm
(B)					
(C)					
(D)					
(E)					

<b>博 崙 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		<b>TITLE</b>	NON-SHIELDED SIDE ENTRY	<b>UNIT</b>	mm
		<b>圖 名</b>	PCB JACK (FOR 6P PLUG)	<b>單位</b>	Inch
<b>PART NO.</b>	8506-B*1S	<b>SCALE</b>	1:1		
<b>REV.</b>	A.1	<b>DATE</b>	2007-03-06		
<b>版本</b>		<b>日期</b>			
<b>CHECKED BY</b>	Michaell	<b>DRAWN BY</b>	製 圖	<b>Valiant</b>	
<b>審 核</b>					