


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : 8506-B*1*S

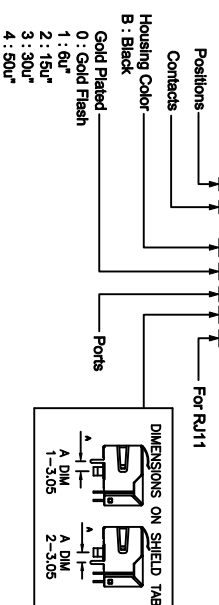

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)					TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

博 崑 電 子 股 份 有 限 公 司
POWERWAY ELECTRONICS CO.,LTD.



TITLE	SHIELDED RJ11	UNIT
圖名	SIDE ENTRY PCB JACK	mm
PART NO.	8506S-B*1*S	inch
REV.	DATE	SCALE
版本	日期	比例
CHECKED BY	DRAWN BY	
審核	製圖	