


**Electrical Characteristics :**  
 Insulation Resistance : 500M $\Omega$  Min.  
 Contact Resistance : 50m $\Omega$  Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**

Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 CUL File No : E215573

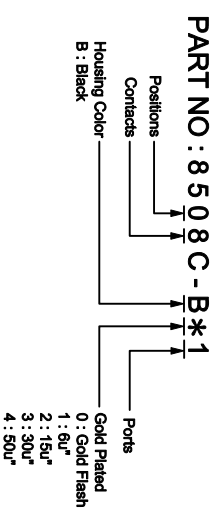

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm
(B)					
(C)					
(D)					
(E)					

<b>博 崙 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		<b>TITLE</b> 圖 名 NON-SHIELDED RJ45 PCB JACK		<b>UNIT</b> 單位 mm	
<b>PART NO.</b> 料 號 8508C-B*1		<b>REV.</b> 版 本 A.1		<b>DATE</b> 日期 2007-04-17	
<b>CHECKED BY</b> 審 核 Michael		<b>DRAWN BY</b> 製 圖 David		<b>SCALE</b> 比 例 1 : 1	