



**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 Shielded: Brass ,Nickel Plating  
 CUL File No : E215573

**PART NO : 8 5 0 8 C - B \* 1 \***

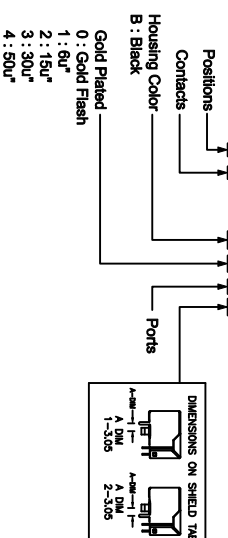

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
Ⓐ	A.1	Withstand Voltage 500修改為 1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
Ⓑ					
Ⓒ					
Ⓓ					
Ⓔ					

 <b>博 歲 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		TITLE	SHEIDED RJ45	UNIT	mm
		圖名	SIDE ENTRY PCB JACK	單位	inch
PART NO.	8508C-B*1*	SCALE	1:1		
REV.	A.1	DATE	2007-04-03		
版本	日期				
CHECKED BY	Michael	DRAWN BY	製圖	David	
審核					