


SUGGESTED PCB LAYOUT  
TOP VIEW

**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**


Housing: Nylon With Glass Fiber, UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 Plank: Brass , Nickel Plating  
 CUL File No : E215573

**PART NO : 8 5 6 6 A - B \* 1**

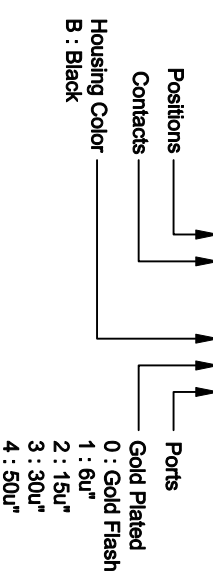

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	
(B)					
(C)					
(D)					
(E)					

TOLERANCE(公差) :  
 0.000 mm ± 0.075mm  
 0.00 mm ± 0.15mm  
 0.0 mm ± 0.25mm

 <b>博 威 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		TITLE	RJ11 SMT SIDE ENTRY PCB JACK	UNIT	mm
		DWG NO.	8566A-B*1	SCALE	1:1
REV.	A.1	DATE	2007-01-29	CHECKED BY	Aaron
CHECKED BY	審 核	DRAWN BY	製 圖		Michael