


PCB EDGE  
SUGGESTED PCB LAYOUT  
TOP VIEW

**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**

Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 CUL File No : E215573

PART NO : 8 5 6 6 B - \* \* 1

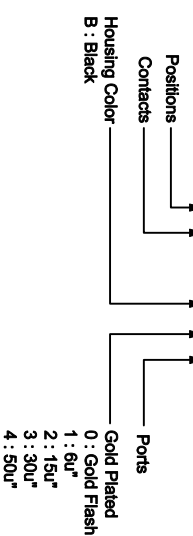

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

<b>博崴電子股份有限公司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>		<b>TITLE</b> 圖名 NON-SHIELDED RJ11 SMT TYPE PCB JACK	<b>UNIT</b> 單位 mm inch
<b>PART NO.</b> 料號 8566B-* * 1	<b>REV.</b> 版本 A.1	<b>DATE</b> 日期 2007-08-21	<b>SCALE</b> 比例 1 : 1
<b>CHECKED BY</b> 審核 Michael	<b>DATE</b> 日期 2007-08-21	<b>DRAWN BY</b> 製圖 Michael	<b>UNIT</b> 單位 mm inch