


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A


Material:

Housing: Nylon With Glass Fiber, UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 Plank: Brass , Nickel Plating
 CUL File No : E215573

PART NO : 8 5 8 8 A - B * 1

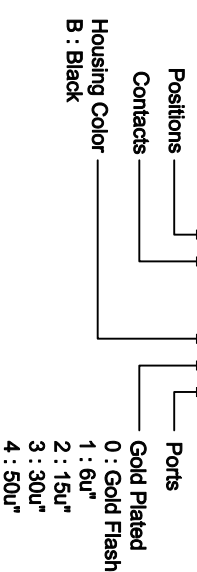

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075mm 0.00 mm ± 0.15mm 0.0 mm ± 0.25mm
(B)					
(C)					
(D)					
(E)					

 博威電子股份有限公司 POWERWAY ELECTRONICS CO.,LTD.		TITLE	RJ45 SMT SIDE ENTRY PCB JACK	UNIT	mm
		DWG NO.	8588A-B*1	SCALE	1:1
REV.	A.1	DATE	2007-01-30	CHECKED BY	Aaron
CHECKED BY	審核	DRAWN BY	製圖		Michael