
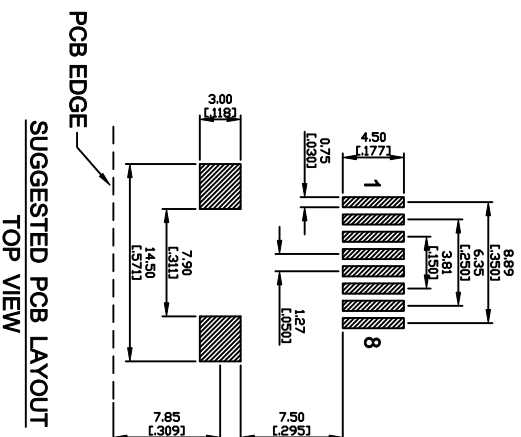
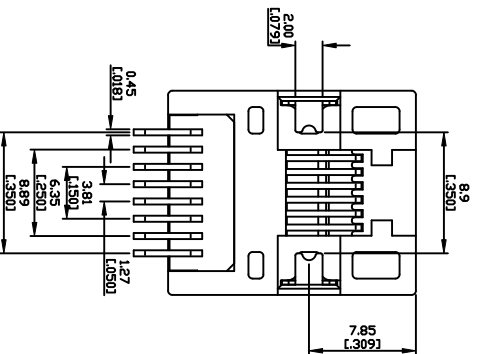
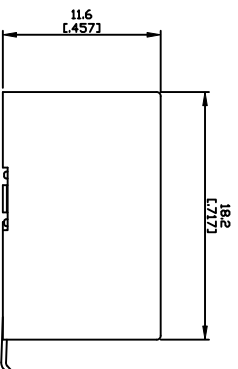


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A



PART NO : 8 5 8 8 B - B * 1

Positions →
 Contacts →
 Housing Color →
 B : Black

Ports
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

PW 博崴電子股份有限公司
 POWERWAY ELECTRONICS CO.,LTD.

TITLE	圖名	NON-SHIELDED RJ45 SMT TYPE PCB JACK	UNIT	mm
PART NO.	料號	8588B-**-1	SCALE	inch
REV.	版本	A.1	比例	1:1
CHECKED BY	日期	DATE	2007-08-26	
審核	Michael	DRAWN BY	Michael	
		製圖		