


RECOMMENDED PCB LAYOUT
TOP VIEW




Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 30m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

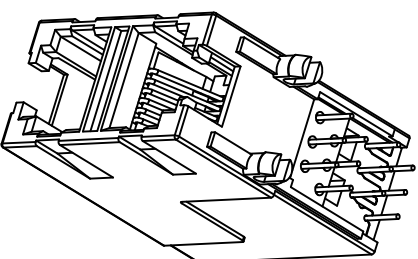

Material:

Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Copper Alloy
 Optional Gold Plating Over Nickel
 CUL File No : E215573

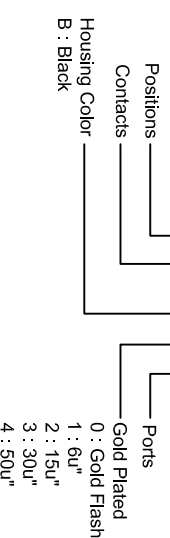PART NO : 8 2 6 6 - B * 1 - R



ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 82 (SERIES)
(A)					TOLERANCE(公差) : 0.000 mm \pm 0.075 mm 0.00 mm \pm 0.15 mm 0.0 mm \pm 0.25 mm
(B)					
(C)					
(D)					
(E)					

 博 崙 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	TITLE	RJ11, Unshielded, Receptacle, Horizontal, 1x2 Port, THT		UNIT	mm	
	PART NO.	8266-B * 1-R			SCALE	1 : 1
	REV.	A.0	DATE	2011-01-05	 比例	
	CHECKED BY	審 核	Aaron	DRAWN BY		製 圖