



	1	2	3	4	5	6	7	8		
A	NO.	NAME	MATERIAL	PLATING		REV	ZONE	REVISION	DATE	APPD.
	1	SHELL	Copper Alloy	(Black)Nickel Plated						
	2	TOP INSULATOR	THERMOPLASTIC							
	3	BOTTOM INSULATOR	THERMOPLASTIC							
B	4	BOTTOM CONTACT	Copper Alloy	Tin-Gold Plated						
	5	TOP CONTACT	Copper Alloy	Tin-Gold Plated						

	6	7	8
	REV	ZONE	REVISION





SUD-160M1 B - L * *

Series _____
 Type _____
 Color _____
 Material _____

Shell
 H : Nickel Plated
 Gold Plated
 0 : Gold Flash
 1 : 5μ"
 2 : 15μ"
 3 : 30μ"

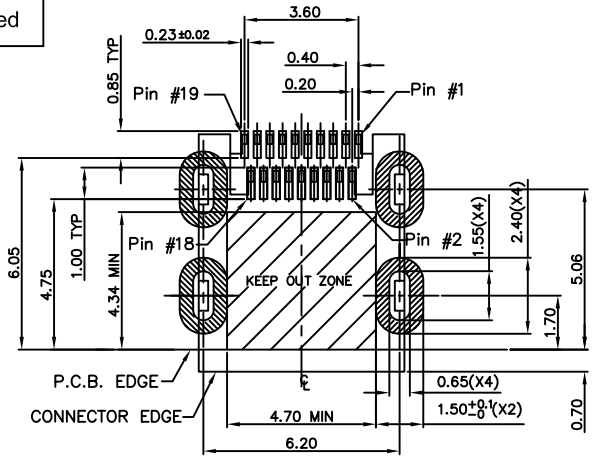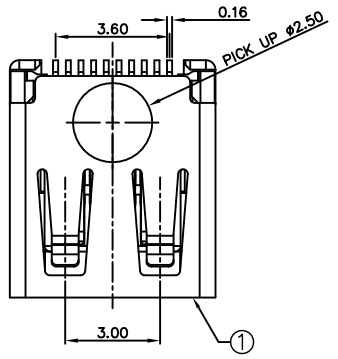

RECOMMENDED PCB LAYOUT
 DEFAULT TOLERANCE : ±0.05
 RECOMMENDED PCB THICKNESS : 0.8mm

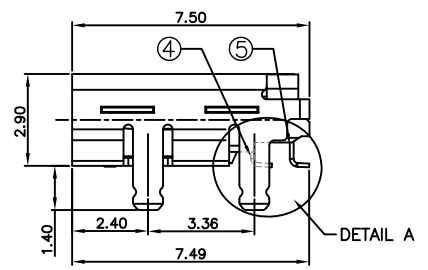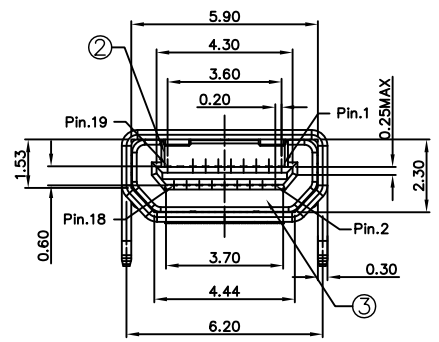

PW POWERWAY ELECTRONICS CO.,LTD.
 博歲電子股份有限公司

COMPUTER NO.			UNIT	SCALE	PART NAME	
D : \ DWG \ SUD-160M			mm	1 : 1	HDMI Receptacle, Type D, SMT	
APPD.	CKD.	DWG.	DATE	TOLERANCE		REV.
	Aaron	Song Lin	2011-01-28	0.000mm ± 0.075mm 0.00 mm ± 0.20 mm 0.0 mm ± 0.25 mm		A.0

MODEL	SUD-160M1B-L * *	PAGE 1 OF 1
-------	------------------	-------------